

PDC250A

Prime Power: 180KW/225KVA

Standby Power: 200KW/250KVA

Voltage: 400V

Powered by Cummins 6CTAA8.3-G2 Engine

Genset Performance

- 230/400V, 50Hz, 0.8PF, 3 Phases 4 wires
- Frequency drop $\leq 3\%$
- Voltage regulation $\leq 0.3\%$
- The steady state frequency $\leq 0.5\%$
- The steady state voltage deviation $\leq \pm 1\%$
- The transient frequency deviation $\leq +10\% \leq -7\%$
- The transient voltage deviation $\leq +20\% \leq -15\%$
- Frequency recovery time $\leq 3S$
- Voltage recovery time $\leq 1S(\text{Voltage} \pm 3\%)$
- THF (Telephone Harmonic Factor) < 3
- TIF (Telephone Influence Factor) < 50
- Comply to Standard NEMA MG1-22.43
- Built-in vibration isolator with high performance on shock absorption.
- Product standards: (1) GB/T 2820-2022 / IS08528:2018
(2) GB/T 4712-2008 (3) YD/T 502-2020 (4) YD/T 1051-2018

Standard Configuration

- Cummins Engine
- Brushless synchronous alternator
- POWERTEC intelligent controller
- 40°C standard ambient temperature (50°C Optional)
- Circuit breaker (3P)
- Float battery charger
- Battery connect wire
- Steel base frame
- Silencer, bellows, exhaust bend
- Manual book and files

Optional Items

- Starting batteries
- Fuel tank
- Oil-water separator
- Sensor for low coolant level, low fuel/oil level
- Automatically monitoring & controlling system of city power
- Coolant heater
- Oil heater
- Heat exchanger--Water cooled tower system
- Soundproof canopy
- Trailer
- Design and construction of environmental protection engineering for the Genset room



Diesel Engine

- Model: **6CTAA8.3-G9**
- Structure: The cylinder liner adopts a platform mesh honing design and a corrosion-resistant high-nickel cast iron piston, which greatly reduces engine oil consumption, enhanced durability, longer service life
- Integrated design: the cylinder block, cylinder head and other parts are "multi-purpose in one piece", reducing the number of connecting parts; 40% fewer parts than other similar engines, greatly reducing the failure rate;
- Fuel system: Bosch in-line fuel pump, more complete combustion under high injection pressure, less energy loss, More powerful power and strong fuel adaptability;
- Filtration system: Dry core air filter with air intake resistance indicator
Spin-on Paper Based Full Flow and Bypass Oil Filters Spin-on anti-corrosion water filter;
- Leading design and manufacturing: advanced design, exquisite manufacturing technology, reliable and durable.
- Holset supercharger: with integrated wastegate valve, strong low-speed response and power.



Alternator

- Optional brands: **Stamford / Marathon / Faraday / Engga / Mecc Alt**
- Brushless, 4 pole rotating magnetic field, single bearing with protective cover.
- Insulation: H Class.
- IP Class: IP23
- Cooling system
- AC exciter, rotate rectifying
- Rotor and exciter made with high temperature insulating resin, to satisfy tough environment.
- Rotor dynamic balancing complys for BS5625, class 2.
- Sealed with advanced lubricating grease to prolong life of bearing.



Standard

- 3 phases voltage: U_a, U_b, U_c
- Frequency $F1$
- Apparent power PR
- Power factor PF
- Coolant temperature WT
- Temperature $^{\circ}C$ display
- Oil pressure OP
- Engine speed
- 3 phases current: I_a, I_b, I_c
- Active power PA
- Power factor PF
- Temperature $^{\circ}C$ display
- KPa/Psi/Bar display
- Battery voltage V
- Running Hour
- Starting timer:(999999)



Standard Protection

Genset Protection

- Programmable I/O signal
- Emergency stop

Engine Protection

- Stop for over speed
- Low oil pressure
- High Coolant temperature
- Sensor fail
- Alarm for low/high battery voltage
- Low battery voltage
- Fail to start/Cranking fail

Alternator Protection

- Over Voltage
- Over current
- Voltage signal lost
- Over Voltage
- Over frequency
- Under frequency

Control System Components

- Manual/auto/stop/start
- Setting button
- Fault status indicators
- Screen menu selection button
- Emergency stop button
- Digital displayer



Communication Interface

(Option)

- International standard MODBUS communication protocol RS232/ RS485 is suitable for remote control and monitor; It is easy integrated with SCADA;.

Genset

Model	PDC250A
Prime Rating (kw)	180
Standby Rating (kw)	200
Rate voltage(V)	400
Rate current(A)	325
Power factor	0.8
Frequency(Hz)	50

Engine



Engine Model	6CTAA8.3-G9
Gross Engine output-Prime (kw)	-
Gross Engine output-Standby (kw)	231
Bore * stroke (mm)	114*135
Cylinders and structure	6 In line
Displacement(Liter)	8.3
Compression Ratio	16.7:1
Intake way	Turbocharged and Charge Air Cooled
Max intake resistance (KPa)	6.2
Air intake (m3/h)	788
Max exhaust back pressure (KPa)	10
Exhaust gas flow (m3/h)	1900
Exhaust temp (°C)	520
Cooling way	Water Radiator & Fan
Fan exhaust flow (m3/min)	380
Coolant capacity (L)	34
Highest water temperature(°C)	104
Minimum air opening to room (m2)	1.5/1.3
Thermostat range (°C)	82-95
Max oil temperature (°C)	121
Lubrication system oil capacity (L)	23.8
Rate load fuel consumption(L/H)	57
Standard Governor/Class	Electronic

Alternator

Rated Voltage(V)	230/400
Output Way	3 Phases, 4 wires
Rated power factor	0.8
Exciter	Brushless, Self-exciter
Max voltage regulation	±1%
Phase	3
Protection class	IP21-23
Insulation class	H

Controller

Brand	POWERTEC
-------	----------

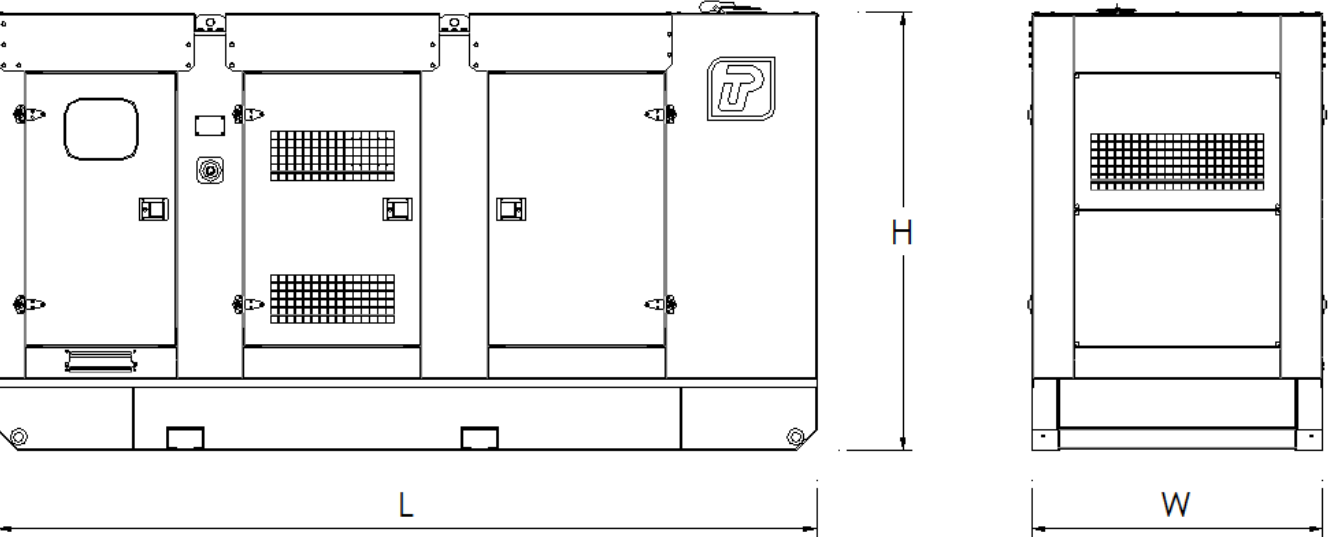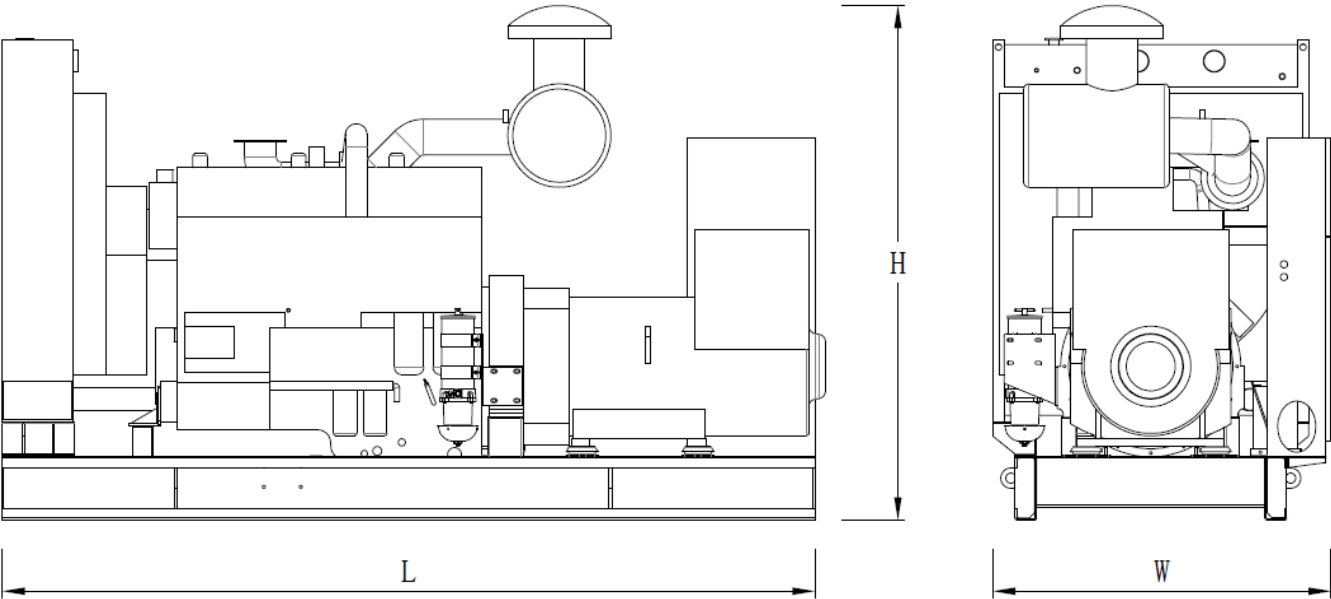

Type	Dimension (mm) (L*W*H)	Weight (kg)	Fuel Tank Capacity (L)
Open Type	2650*1112*1443	1900	315
Silent Type	3500*1245*2052	3160	550

Contact Us

Powertec Generator System Inc.

Add: Danshui Yanna Industry Zone, Huiyang, Huizhou, Guangdong, China
Tel: +86 752-3911119 / 3911118
Fax: +86 752-3911110
Web: www.powertec.com.cn
Email: powertec@powertec.com.cn