

PDC315A

Prime Power: 230KW/288KVA

Standby Power: 250KW/313KVA

Voltage: 400V

Powered by Cummins QSL8.9-G33 Engine

Genset Performance

- 230/400V, 50Hz, 0.8PF, 3 Phases 4 wires
- Frequency drop $\leq 3\%$
- Voltage regulation $\leq 0.3\%$
- The steady state frequency $\leq 0.5\%$
- The steady state voltage deviation $\leq \pm 1\%$
- The transient frequency deviation $\leq +10\%$ $\leq -7\%$
- The transient voltage deviation $\leq +20\%$ $\leq -15\%$
- Frequency recovery time $\leq 3S$
- Voltage recovery time $\leq 1S(\text{Voltage} \pm 3\%)$
- THF (Telephone Harmonic Factor) < 3
- TIF (Telephone Influence Factor) < 50
Comply to Standard NEMA MG1-22.43
- Built-in vibration isolator with high performance on shock absorption.
- Product standards: (1) GB/T 2820-2022 / ISO8528:2018
(2) GB/T 4712-2008 (3) YD/T 502-2020 (4) YD/T 1051-2018

Standard Configuration

- Cummins Engine
- Brushless synchronous alternator
- POWERTEC intelligent controller
- 40°C standard ambient temperature
(50°C Optional)
- Circuit breaker (3P)
- Float battery charger
- Battery connect wire
- Steel base frame
- Silencer, bellows, exhaust bend
- Manual book and files

Optional Items

- Starting batteries
- Fuel tank
- Oil-water separator
- Sensor for low coolant level, low fuel/oil level
- Automatically monitoring & controlling system of city power
- Coolant heater
- Oil heater
- Heat exchanger--Water cooled tower system
- Soundproof canopy
- Trailer
- Design and construction of environmental protection engineering for the Genset room

Diesel Engine

- Model: **QSB8.9-G33**
- Leading in-cylinder combustion technology gives the engine basic platform excellent reliability and durability, good inheritance, long-lasting advantages, and easy upgrades;
- Integrated oil and water pipelines replace traditional hoses, eliminating the risk of leakage;
- Enhanced cooling and lubrication functions effectively extend the service life of the engine;
- Cummins high-pressure common rail fuel system (HPCR) realizes multi-point injection, rapid throttle response at different speeds, more efficient power output, better fuel economy and lower noise.
- Two-stage dual fuel filters ensure a balanced level of particle dispersion, maximize the life of the fuel filter, and protect the main components of the fuel system.
- Emission standards: Meet the National Phase III emission standards;
- The engine may be operated at :
1500 RPM up to 2000 m and 104 ° F (40 ° C) without power deration.
For sustained operation above these conditions, derate by 4% per 300 m, and 3% per 10 ° C.



Alternator

- Optional brands: **Stamford / Marathon / Faraday / Engga / Mecc Alt**
- Brushless, 4 pole rotating magnetic field, single bearing with protective cover.
- Insulation: H Class.
- IP Class: IP23
- Cooling system
- AC exciter, rotate rectifying
- Rotor and exciter made with high temperature insulating resin, to satisfy tough environment.
- Rotor dynamic balancing complies for BS5625, class 2.5
- Sealed with advanced lubricating grease to prolong life of bearing.



Standard

- 3 phases voltage: U_a, U_b, U_c
- Frequency $F1$
- Apparent power PR
- Power factor PF
- Coolant temperature WT
- Temperature $^{\circ}C$ display
- Oil pressure OP
- Engine speed
- 3 phases current: I_a, I_b, I_c
- Active power PA
- Power factor PF
- Temperature $^{\circ}C$ display
- KPa/Psi/Bar display
- Battery voltage V
- Running Hour
- Starting timer:(999999)



Standard Protection

Genset Protection

- Programmable I/O signal
- Emergency stop

Engine Protection

- Stop for over speed
- Low oil pressure
- High Coolant temperature
- Sensor fail
- Alarm for low/high battery voltage
- Low battery voltage
- Fail to start/Cranking fail

Alternator Protection

- Over Voltage
- Over current
- Voltage signal lost
- Over Voltage
- Over frequency
- Under frequency

Control System Components

- Manual/auto/stop/start
- Setting button
- Fault status indicators
- Screen menu selection button
- Emergency stop button
- Digital displayer



Communication Interface

(Option)

- International standard MODBUS communication protocol RS232/ RS485 is suitable for remote control and monitor; It is easy integrated with SCADA;.

Genset

Model	PDC315A
Prime Rating (kw)	230
Standby Rating (kw)	250
Rate current(A)	415
Power factor	0.8
Frequency(Hz)	50

Engine



Engine Model	QSL8.9-G33
Gross Engine output-Prime (kw)	270
Gross Engine output-Standby (kw)	292
Bore * stroke (mm)	116.5*144.5
Cylinders and structure	6 In line
Displacement(Liter)	8.9
Compression Ratio	16.8:1
Intake way	Turbocharged and Charge Air Cooled
Max intake resistance (KPa)	5
Air intake (m3/h)	844.2
Max exhaust back pressure (KPa)	8
Exhaust gas flow (m3/h)	811.6
Exhaust temp (°C)	512
Cooling way	Water Radiator & Fan
Fan exhaust flow (m3/min)	460
Coolant capacity (L)	33.5
Highest water temperature(°C)	107
Minimum air opening to room (m2)	2.4/2.0
Thermostat range (°C)	82-92
Max oil temperature (°C)	124
Lubrication system oil capacity (L)	28.1
Rate load fuel consumption(L/H)	63.1
Standard Governor/Class	Electronically Controlled High Voltage Common Rail
Emission	China Tier 3 / Euro IIIA

Alternator

Rated Voltage(V)	230/400
Output Way	3 Phases, 4 wires
Rated power factor	0.8
Exciter	Brushless, Self-exciter
Max voltage regulation	±1%
Phase	3
Protection class	IP21-23
Insulation class	H

Controller

Brand	POWERTEC
-------	----------

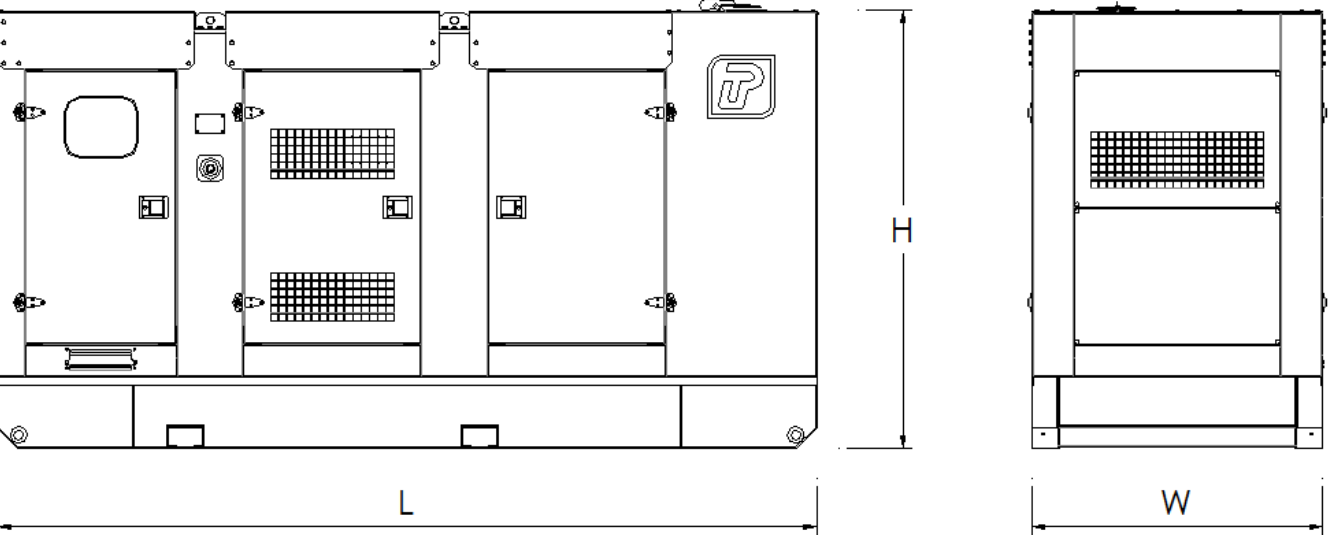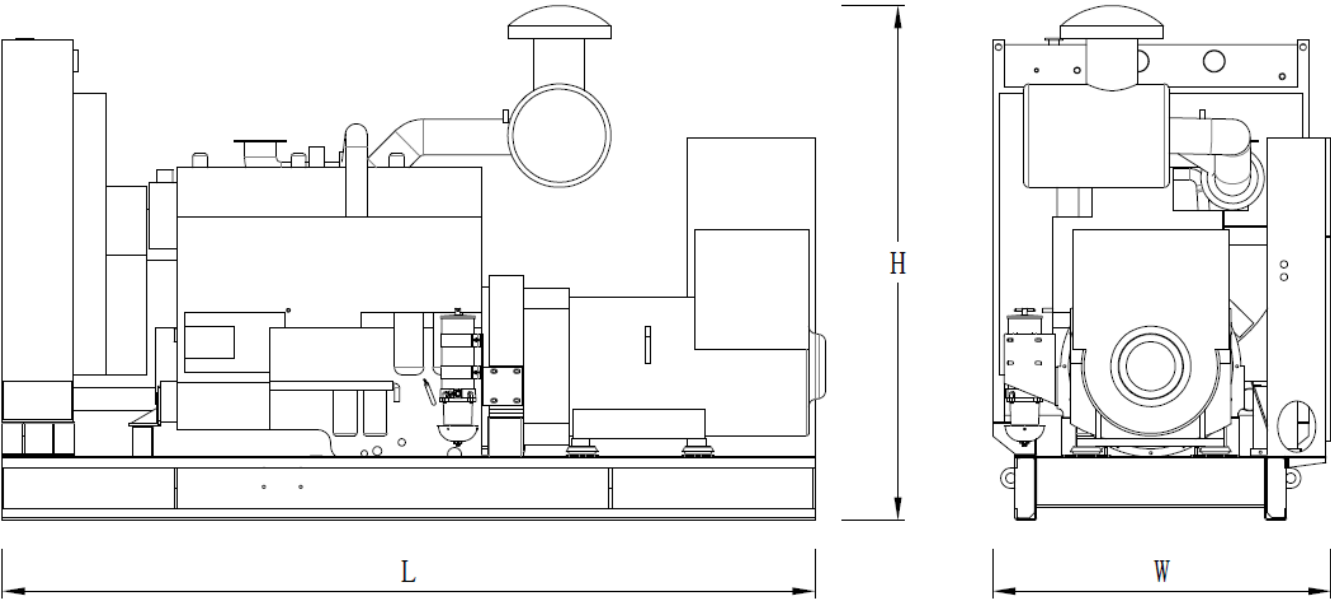

Type	Dimension (mm) (L*W*H)	Weight (kg)	Fuel Tank Capacity (L)
Open Type	3094*1443*1911	3385	500
Silent Type	3950*1400*2115	4785	750

Contact Us

Powertec Generator System Inc.

Add: Danshui Yanna Industry Zone, Huiyang, Huizhou, Guangdong, China
Tel: +86 752-3911119 / 3911118
Fax: +86 752-3911110
Web: www.powertec.com.cn
Email: powertec@powertec.com.cn