

PPE825B

Prime Power: 600KW/750KVA

Standby Power: 660KW/825KVA

Voltage: 400V

Powered by Perkins 4006-23TAG2A Engine

Genset Performance

- 230/400V, 50Hz, 0.8PF, 3 Phases 4 wires
- Frequency drop $\leq 3\%$
- Voltage regulation $\leq 0.3\%$
- The steady state frequency $\leq 0.5\%$
- The steady state voltage deviation $\leq \pm 1\%$
- The transient frequency deviation $\leq +10\%$ $\leq -7\%$
- The transient voltage deviation $\leq +20\%$ $\leq -15\%$
- Frequency recovery time $\leq 3S$
- Voltage recovery time $\leq 1S(Voltage \pm 3\%)$
- THF (Telephone Harmonic Factor) < 3
- TIF (Telephone Influence Factor) < 50
Comply to Standard NEMA MG1-22.43
- Standard equipped with ambient temperature $40^{\circ}C$
Connecting radiator
- Built-in vibration isolator with high performance on
shock absorption.
- Product standards: (1) GB/T 2820-2022 / ISO8528:2018
(2) GB/T 4712-2008 (3) YD/T 502-2020 (4) YD/T 1051-2018

Optional Items

- Starting batteries
- Fuel tank
- Oil-water separator
- Sensor for low coolant level, low fuel/oil level
- Automatically monitoring & controlling system of city power
- Coolant heater
- Oil heater
- Heat exchanger--Water cooled tower system
- Silent type/Trailer
- Standardized container
- Design and construction of environmental protection; engineering for the Genset room.

Standard Configuration

- Perkins Engine
- Brushless synchronous alternator
- POWERTEC intelligent controller
- $40^{\circ}C$ standard ambient temperature
($50^{\circ}C$ Optional)
- Circuit breaker (3P)
- Float battery charger
- Battery connect wire
- Steel base frame
- Silencer, bellows, exhaust bend
- Manual book and files

Diesel Engine

- Model: 4006-23TAG2A
- The Perkins® 4000 Series is a family of 6, 8, 12 and 16 cylinder diesel engines, designed to address today's uncompromising demands within the power generation industry with particular aim at the standby market sector. Developed from a proven engine range that offers superior performance and reliability;
- The 4006-23TAG2A is a turbocharged and air-to-air charge cooled, 6 cylinder diesel engine offered with either temperate or tropical cooling. Its premium features and design provide economic and durable operation as well as an exceptional power to weight ratio, excellent load acceptance and improved gaseous emissions, plus the overall performance and reliability characteristics essential to the power generation market;
- Individual 4 valve cylinder heads giving optimised gas flows;
- Unit fuel injectors ensure ultra fine fuel atomisation and hence controlled rapid combustion;
- Commonality of components with other engines in the 4000 Series family for reduced stocking levels;
- Developed and tested using the latest engineering techniques;
- Piston temperatures controlled by an advanced gallery jet cooling system;
- Tolerant of a wide range of temperature without derate;



Alternator

- Optional brands: **Stamford / Marathon / Faraday / Engga / Mecc Alt**
- Brushless, 4 pole rotating magnetic field, single bearing with protective cover.
- Insulation: H Class.
- IP Class: IP23
- Cooling system
- AC exciter, rotate rectifying
- The stator winding is impregnated and the surface is covered with moisture-proof epoxy insulating paint.
- Rotor and exciter made with high temperature insulating resin, to satisfy tough environment.
- Rotor dynamic balancing complies for BS5625, class 2.5
- Sealed with advanced lubricating grease to prolong life of bearing.



Standard Meters

- 3 phases voltage: U_a, U_b, U_c
- Frequency F1
- Apparent power PR
- Power factor PF
- Coolant temperature WT
- Temperature $^{\circ}\text{C}$ display
- Oil pressure OP
- Engine speed
- 3 phases current: I_a, I_b, I_c
- Active power PA
- Power factor PF
- Temperature $^{\circ}\text{C}$ display
- KPa/Psi/Bar display
- Battery voltage V
- Running Hour
- Starting timer:(999999)



Standard Protection Function

Genset Protection

- Programmable I/O signal
- Emergency stop

Engine Protection

- Stop for over speed
- Low oil pressure
- High Coolant temperature
- Sensor fail
- Alarm for low/high battery voltage
- Low battery voltage
- Fail to start/Cranking fail

Alternator Protection

- Over Voltage
- Over current
- Voltage signal lost
- Over Voltage
- Over frequency
- Under frequency

Control System Components



- Manual/auto/stop/start
- Setting button
- Fault status indicators
- Screen menu selection button
- Emergency stop button
- Digital displayer



Communication Interface (Option)

- International standard MODBUS communication protocol RS232/ RS485 is suitable for remote control and monitor; It is easy integrated with SCADA;.

Genset	
Model	PPE825B
Prime Rating (kw)	600
Standby Rating (kw)	660
Rate current(A)	1083
Power factor	0.8
Frequency(Hz)	50
Engine	
Engine Model	4006-23TAG2A
Gross Engine output-Prime (kw)	632
Gross Engine output-Standby (kw)	695
Bore * stroke (mm)	160*190
Cylinders and structure	6 In line
Displacement(Liter)	22.921
Compression Ratio	13.6:1
Intake way	Turbocharged and air-to-air charge cooled
Max intake resistance (KPa)	3.7
Air intake (m3/h)	3840
Max exhaust back pressure (KPa)	6
Exhaust gas flow (m3/h)	10800
Exhaust temp (°C)	430
Cooling way	Water Radiator & Fan
Fan exhaust flow (m3/min)	800
Coolant capacity (L)	105
Highest water temperature(°C)	98
Minimum air opening to room (m2)	5.0/4.5
Thermostat range (°C)	71-85
Max oil temperature (°C)	125
Lubrication system oil capacity (L)	113.4
Rate load fuel consumption(L/H)	157
Standard Governor/Class	Electronic speed regulation
Alternator	
Rated Voltage(V)	230/400
Output Way	3 Phases, 4 wires
Rated power factor	0.8
Exciter	Brushless, Self-exciter
Max voltage regulation	±1%
Phase	3
Protection class	IP21-23
Insulation class	H
Controller	
Brand	POWERTEC

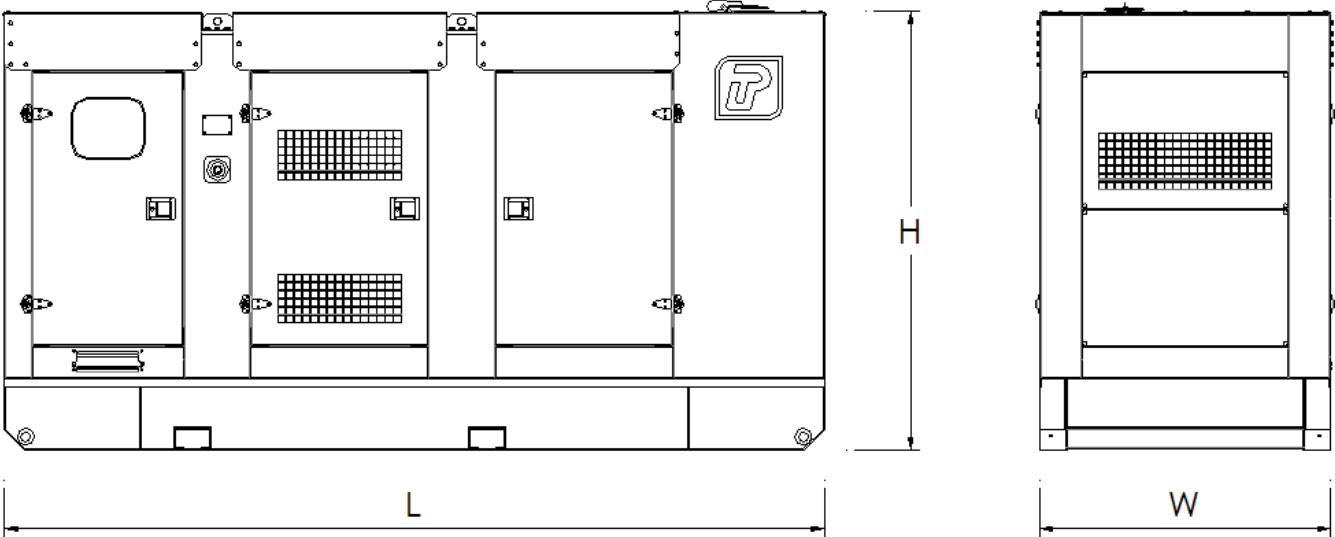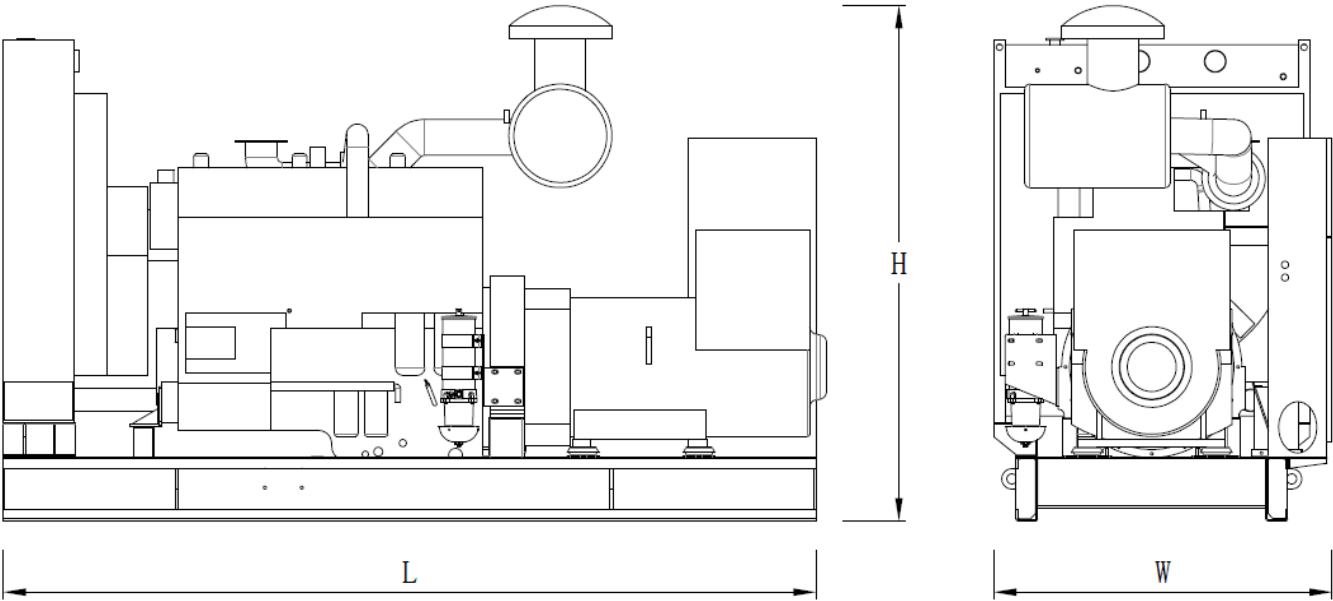

Type	Dimension (mm) (L*W*H)	Weight (kg)	Fuel Tank Capacity (L)
Open Type	4600*1880*2300	6178	-
Silent Type	-	-	-

Contact Us

Powertec Generator System Inc.

Add: Danshui Yanna Industry Zone, Huiyang, Huizhou, Guangdong, China
Tel: +86 752-3911119 / 3911118
Fax: +86 752-3911110
Web: www.powertec.com.cn
Email: powertec@powertec.com.cn