

PYC275B

Prime Power: 200KW/250KVA

Standby Power: 220KW/275KVA

Voltage: 400V

Powered by Yuchai YC6MK350-D30 Engine

Genset Performance

- 230/400V, 50Hz, 0.8PF, 3 Phases 4 wires
- Frequency drop $\leq 3\%$
- Voltage regulation $\leq 0.3\%$
- The steady state frequency $\leq 0.5\%$
- The steady state voltage deviation $\leq \pm 1\%$
- The transient frequency deviation $\leq +10\%$ $\leq -7\%$
- The transient voltage deviation $\leq +20\%$ $\leq -15\%$
- Frequency recovery time $\leq 3S$
- Voltage recovery time $\leq 1S(\text{Voltage} \pm 3\%)$
- THF (Telephone Harmonic Factor) < 3
- TIF (Telephone Influence Factor) < 50
Comply to Standard NEMA MG1-22.43
- Standard equipped with ambient temperature 40°C
Connecting radiator
- Built-in vibration isolator with high performance on
shock absorption.
- Product standards: (1) GB/T 2820-2022 / ISO8528:2018
(2) GB/T 4712-2008 (3) YD/T 502-2020 (4) YD/T 1051-2018

Optional Items

- Starting batteries
- Fuel tank
- Oil-water separator
- Sensor for low coolant level, low fuel/oil level
- Automatically monitoring & controlling system of city power
- Coolant heater
- Oil heater
- Heat exchanger--Water cooled tower system
- Silent type/Trailer
- Standardized container
- Design and construction of environmental protection; engineering for the Genset room.


Standard Configuration

- Guangxi Yuchai Engine
- Brushless synchronous alternator
- POWERTEC intelligent controller
- 40°C standard ambient temperature
(50°C Optional)
- Circuit breaker (3P)
- Float battery charger
- Battery connect wire
- Steel base frame
- Silencer, bellows, exhaust bend
- Manual book and files



Diesel Engine

- Model: **YC6MK350-D30**
- Structure: High-strength cylinder block, reinforced crankshaft, and alloy steel connecting rods make the engine more durable and have a lighter and more compact structure among similar products;
- It adopts advanced and mature electronically controlled high-pressure common rail + high-efficiency supercharging and intercooling technology to accurately control the fuel injection volume and sufficient air intake to ensure that the diesel engine has sufficient combustion, low fuel consumption and low emissions under different load conditions.
- Using a full-flow oil cooler, the heat dissipation efficiency is increased by 30%, effectively reducing the temperature of the oil, allowing the oil to lubricate parts at a reasonable temperature and reducing friction losses;
- The piston is cooled by an internal cooling oil channel, which effectively reduces the piston temperature and has a long service life;
- G3 performance requirements for generator set are met;
- YC6MK series engine after more than 10 years market trial, is widely used in heavy bus, heavy truck, engineering machinery, ship and generator set. After its configuration is upgraded to electronically-control high pressure common rail, the emission meets the requirements for non-road stage III; and it is characterized by sufficient margin, stronger dynamic performance, less fuel consumption and better transient loading capability.

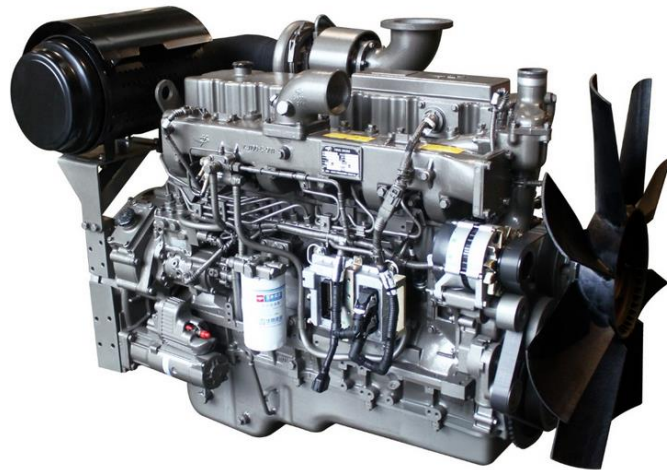

Alternator

- Optional brands: **Stamford / Marathon / Faraday / Engga / Mecc Alt**
- Brushless, 4 pole rotating magnetic field, single bearing with protective cover.
- Insulation: H Class.
- IP Class: IP23
- Cooling system
- AC exciter, rotate rectifying
- The stator winding is impregnated and the surface is covered with moisture-proof epoxy insulating paint.
- Rotor and exciter made with high temperature insulating resin, to satisfy tough environment.
- Rotor dynamic balancing complies for BS5625, class 2.5
- Sealed with advanced lubricating grease to prolong life of bearing.



Standard Meters

- 3 phases voltage: U_a , U_b , U_c
- Frequency $F1$
- Apparent power PR
- Power factor PF
- Coolant temperature WT
- Temperature $^{\circ}C$ display
- Oil pressure OP
- Engine speed
- 3 phases current: I_a , I_b , I_c
- Active power PA
- Power factor PF
- Temperature $^{\circ}C$ display
- KPa/Psi/Bar display
- Battery voltage V
- Running Hour
- Starting timer:(999999)



Standard Protection Function

Genset Protection

- Programmable I/O signal
- Emergency stop

Engine Protection

- Stop for over speed
- Low oil pressure
- High Coolant temperature
- Sensor fail
- Alarm for low/high battery voltage
- Low battery voltage
- Fail to start/Cranking fail

Alternator Protection

- Over Voltage
- Over current
- Voltage signal lost
- Over Voltage
- Over frequency
- Under frequency

Control System Components

- Manual/auto/stop/start
- Setting button
- Fault status indicators
- Screen menu selection button
- Emergency stop button
- Digital displayer



Communication Interface (Option)

- International standard MODBUS communication protocol RS232/ RS485 is suitable for remote control and monitor; It is easy integrated with SCADA;.

Genset

Model	PYC275B
Prime Rating (kw)	200
Standby Rating (kw)	220
Rate current(A)	361
Power factor	0.8
Frequency(Hz)	50

Engine


Engine Model	YC6MK350-D30
Gross Engine output-Prime (kw)	235
Gross Engine output-Standby (kw)	259
Bore * stroke (mm)	123*145
Cylinders and structure	6 In line
Displacement(Liter)	10.34
Compression Ratio	16.8:1
Intake way	Supercharge/Air-Air intercooling
Max intake resistance (KPa)	5
Air intake (m3/h)	918
Max exhaust back pressure (KPa)	10
Exhaust gas flow (m3/h)	2148
Exhaust temp (°C)	580
Cooling way	Water Radiator & Fan
Fan exhaust flow (m3/min)	612
Coolant capacity (L)	65
Highest water temperature(°C)	99
Minimum air opening to room (m2)	1.9/1.6
Thermostat range (°C)	80-90
Max oil temperature (°C)	120
Lubrication system oil capacity (L)	30
Rate load fuel consumption(L/H)	57.5
Standard Governor/Class	Electronically controlled high voltage common rail
Emission	China Tier 3

Alternator

Rated Voltage(V)	230/400
Output Way	3 Phases, 4 wires
Rated power factor	0.8
Exciter	Brushless, Self-exciter
Max voltage regulation	±1%
Phase	3
Protection class	IP21-23
Insulation class	H

Controller

Brand	POWERTEC
-------	----------

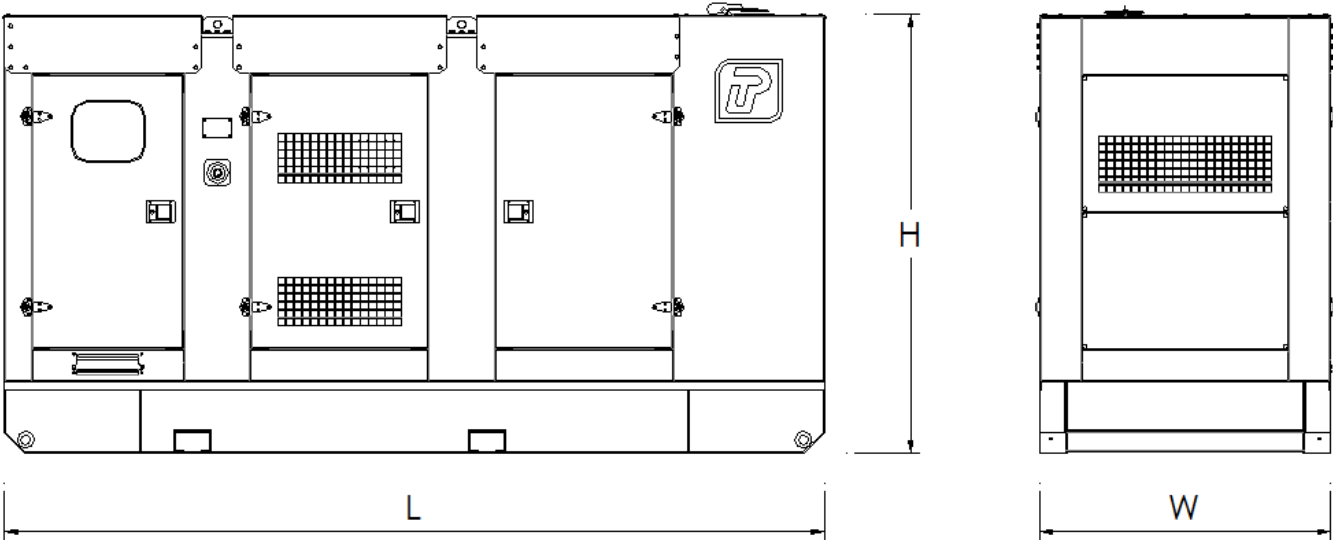

Type	Dimension (mm) (L*W*H)	Weight (kg)	Fuel Tank Capacity (L)
Open Type	2900*1197*1589	2400	—
Silent Type	3950*1400*2115	3800	750

Contact Us

Powertec Generator System Inc.

Add: Danshui Yanna Industry Zone, Huiyang, Huizhou, Guangdong, China
Tel: +86 752-3911119 / 3911118
Fax: +86 752-3911110
Web: www.powertec.com.cn
Email: powertec@powertec.com.cn