

PYC3000B

Prime Power: 2200KW/2750KVA Standby Power: 2400KW/3000KVA Voltage: 400V

Powered by Yuchai YC16VC3600-D31 Engine

Genset Performance

- 230/400V, 50Hz, 0.8PF, 3 Phases 4 wires
- Frequency drop $\leq 3\%$
- Voltage regulation $\leq 0.3\%$
- The steady state frequency $\leq 0.5\%$
- The steady state voltage deviation $\leq \pm 1\%$
- The transient frequency deviation $\leq +10\% \leq -7\%$
- The transient voltage deviation $\leq +20\% \leq -15\%$
- Frequency recovery time $\leq 3S$
- Voltage recovery time $\leq 1S(\text{Voltage} \pm 3\%)$
- THF (Telephone Harmonic Factor) < 3
- TIF (Telephone Influence Factor) < 50
Comply to Standard NEMA MG1-22.43
- Standard equipped with ambient temperature 40°C
Connecting radiator
- Built-in vibration isolator with high performance on shock absorption.
- Product standards: (1) GB/T 2820-2022 / ISO8528:2018
(2) GB/T 4712-2008 (3) YD/T 502-2020 (4) YD/T 1051-2018

Optional Items

- Starting batteries
- Circuit breaker
- Fuel tank
- Oil-water separator
- Sensor for low coolant level, low fuel/oil level
- Automatically monitoring & controlling system of city power
- Coolant heater
- Oil heater
- Heat exchanger--Water cooled tower system
- Silent type/Trailer
- Standardized container
- Design and construction of environmental protection; engineering for the Genset room.


Standard Configuration

- Guangxi Yuchai Engine
- Brushless synchronous alternator
- POWERTEC intelligent controller
- 40°C standard ambient temperature
(50°C Optional)
- Float battery charger
- Battery connect wire
- Steel base frame
- Silencer, bellows, exhaust bend
- Manual book and files



Diesel Engine

- Model: YC16VC3600-D31
- High-strength material, reinforced grid structure with cambered surface, and 4-bolt main bearing structure are adopted for the engine body; thus the engine body is characterized by high stiffness, slight vibration, and lower noise.
- The world-class equipment and technologies are used for production; thus, the quality of such model is stable and reliable;
- The structure of one head for one cylinder is adopted; maintenance window is set at the side of the engine body, which ensures easy maintenance;
- Application of general parts, high serialization degree and "one-cylinder and one-head" structure, ensuring a low overall maintenance cost;
- G3 performance requirements for generator set are met;
- The YC16VC-D31 series engine is a classic product developed by Yuchai. It has the advantages of energy saving and environmental protection, excellent performance, compact structure, reliability and durability. The emission of pollutants, power performance, economy and reliability index reach the international advanced level.

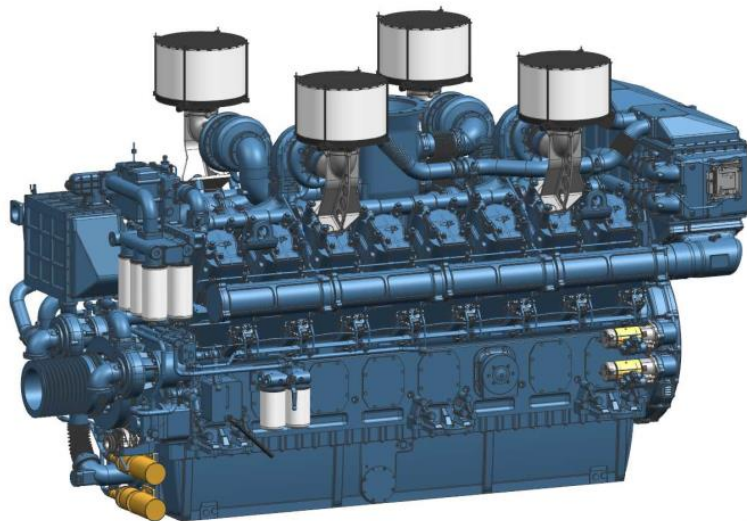

Alternator

- Optional brands: **Stamford / Marathon / Faraday / Engga / Mecc Alt**
- Brushless, 4 pole rotating magnetic field, single bearing with protective cover.
- Insulation: H Class.
- IP Class: IP23
- Cooling system
- AC exciter, rotate rectifying
- The stator winding is impregnated and the surface is covered with moisture-proof epoxy insulating paint.
- Rotor and exciter made with high temperature insulating resin, to satisfy tough environment.
- Rotor dynamic balancing complies for BS5625, class 2.5
- Sealed with advanced lubricating grease to prolong life of bearing.



Standard Meters

- 3 phases voltage: U_a, U_b, U_c
- Frequency F1
- Apparent power PR
- Power factor PF
- Coolant temperature WT
- Temperature $^{\circ}\text{C}$ display
- Oil pressure OP
- Engine speed
- 3 phases current: I_a, I_b, I_c
- Active power PA
- Power factor PF
- Temperature $^{\circ}\text{C}$ display
- KPa/Psi/Bar display
- Battery voltage V
- Running Hour
- Starting timer:(999999)



Standard Protection Function

Genset Protection

- Programmable I/O signal
- Emergency stop

Engine Protection

- Stop for over speed
- Low oil pressure
- High Coolant temperature
- Sensor fail
- Alarm for low/high battery voltage
- Low battery voltage
- Fail to start/Cranking fail

Alternator Protection

- Over Voltage
- Over current
- Voltage signal lost
- Over Voltage
- Over frequency
- Under frequency

Control System Components


- Manual/auto/stop/start
- Setting button
- Fault status indicators
- Screen menu selection button
- Emergency stop button
- Digital displayer



Communication Interface (Option)

- International standard MODBUS communication protocol RS232/ RS485 is suitable for remote control and monitor; It is easy integrated with SCADA;.

Genset	
Model	PYC3000B
Prime Rating (kw)	2200
Standby Rating (kw)	2400
Rate current(A)	3969
Power factor	0.8
Frequency(Hz)	50
Engine	
Engine Model	YC16VC3600-D31
Gross Engine output-Prime (kw)	2405
Gross Engine output-Standby (kw)	2646
Bore * stroke (mm)	200*210
Cylinders and structure	16 Cylind V-type
Displacement(Liter)	105.56
Compression Ratio	13.5: 1
Intake way	Supercharge/Water-Air intercooling
Max intake resistance (KPa)	6
Air intake (m3/h)	13200
Max exhaust back pressure (KPa)	10
Exhaust gas flow (m3/h)	37590
Exhaust temp (°C)	550
Cooling way	Water Radiator & Fan
Fan exhaust flow (m3/min)	3600
Coolant capacity (L)	624
Highest water temperature(°C)	97
Minimum air opening to room (m2)	12/10
Thermostat range (°C)	75-85
Max oil temperature (°C)	110
Lubrication system oil capacity (L)	520
Rate load fuel consumption(L/H)	580.3
Standard Governor/Class	Electronic unit pump
Emission	China Tier 3
Alternator	
Rated Voltage(V)	230/400
Output Way	3 Phases, 4 wires
Rated power factor	0.8
Exciter	Brushless, Self-exciter
Max voltage regulation	±1%
Phase	3
Protection class	IP21-23
Insulation class	H
Controller	
Brand	POWERTEC

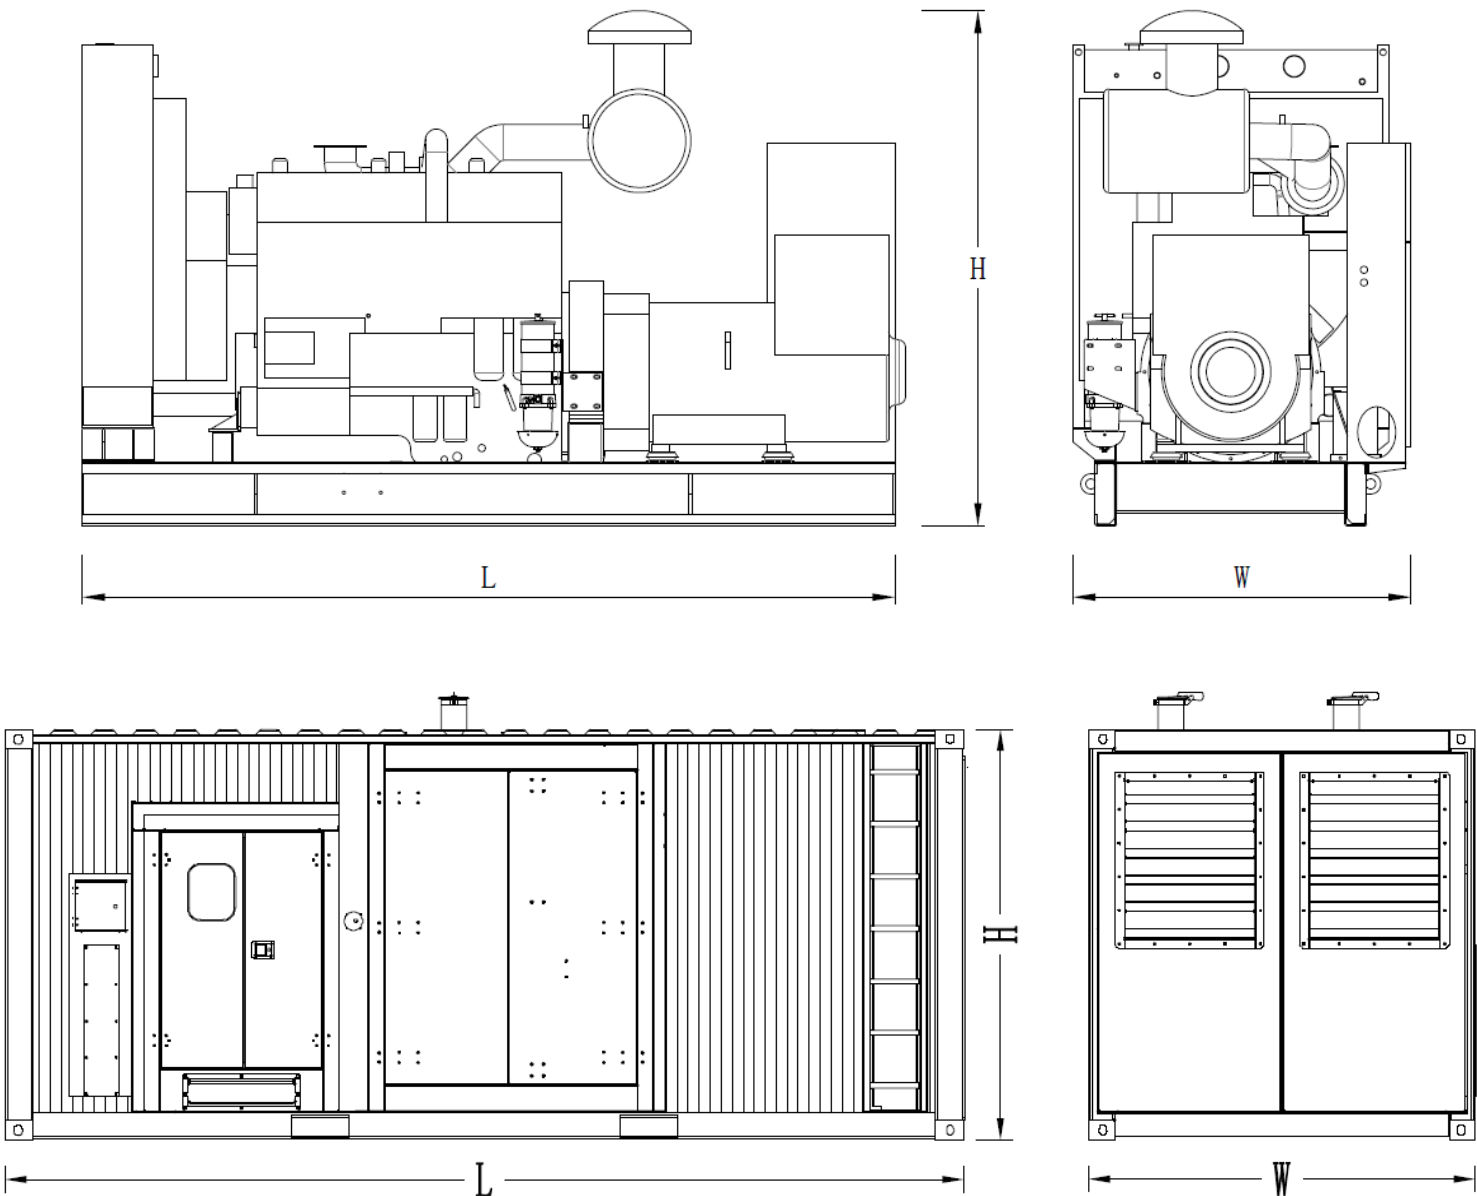

Type	Dimension (mm) (L*W*H)	Weight (kg)	Fuel Tank Capacity (L)
Open Type	8200*2877*3356	23900	—
Silent Type	—	—	—

Contact Us

Powertec Generator System Inc.

Add: Danshui Yanna Industry Zone, Huiyang, Huizhou, Guangdong, China
Tel: +86 752-3911119 / 3911118
Fax: +86 752-3911110
Web: www.powertec.com.cn
Email: powertec@powertec.com.cn